



SEALTITE 1FR-V; 2FR-V; & 3FR-V


PRODUCT DESCRIPTION

- Sealtite 1FR-V; 2FR-V; & 3FR-V has been tested and certified under UL 2079; visit www.ul.com for assembly and system information
- Sealtite 1FR-V; 2FR-V; & 3FR-V is supplied precompressed along with tested and approved accessories
- Sealtite 1FR-V; 2FR-V; & 3FR-V is designed for vertical expansion joints requiring a fire-rating



COLORS

Tremco Spectrem® colors (pictured below) and other colors available by request

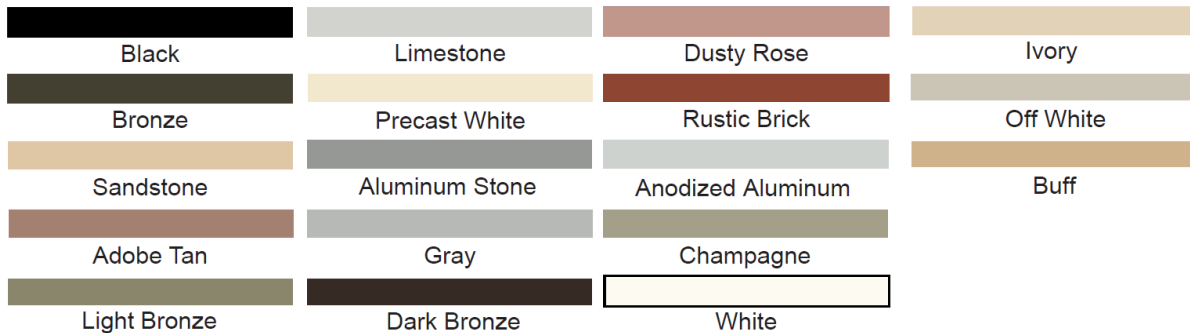

LIMITATIONS AND INSTALLATION CONSIDERATIONS

- Joints must be sized by measuring every 5 – 7 feet to ensure gap opening is uniform and depth is sufficient for the supplied material
- Will not adhere to surfaces contaminated by oil, grease, or dust
- Store material in a dry, enclosed area, off the ground, and out of direct sunlight. Do not install when raining or snowing

NOT INTENDED FOR

- Joints submerged in water
- Joints in contact with harsh chemicals
- Horizontal joints
- Cross joints in copings and projecting stonework

WARRANTY

Schul Products are warranted to be free of defects in materials, but no warranty is made as to appearance or color. No other warranty, expressed or implied, is made with respect to Schul Products, including warranties of MERCHANTABILITY and FITNESS FOR A PARTICULAR PURPOSE. The sole and exclusive remedy under this warranty shall be to replace or refund the purchase price of the quantity of Schul Products proven to be defective, and there is no liability whatsoever for other loss or damage.



INTERNATIONAL QUALITY REGISTRARS CORP.
QUALITY SYSTEM REGISTRATION; ISO 9001 CERTIFIED



MADE IN THE USA
FROM DOMESTIC AND IMPORTED COMPONENTS

SCHUL INTERNATIONAL COMPANY
TELEPHONE: (800) 848-1120 • FAX: (800) 998-9105 • WEB ADDRESS: www.schul.com
34 EXECUTIVE DRIVE, HUDSON, NH 03051